

# NORSTEEL ROOF SYSTEMS

STYLE

## CFR ROOF CURB FOR SSR

FEATURE

HIGH QUALITY ROOF CURB SPECIFICALLY  
DESIGNED AND MANUFACTURED FOR USE  
WITH NORSTEEL SSR ROOF



- Concealed curb to roof fasteners.
- Mitered corners and seams joined by weathertight and airtight welds.
- Splash protection provided by factory installed diverter.
- Specially designed cricket assures water diversion around the curb.
- Curb includes all components for installation on Norsteel's SSR Roof.

The design of the Norsteel CFR Roof Curb has been refined and proven with the installation of thousands of units on Norsteel SSR roofs.

Contact [www.norsteel.com](http://www.norsteel.com) for more information.

# BURGLAR BARS, SKYLIGHTS, VENTS AND ROOF HATCHES ARE AVAILABLE OPTIONS FOR NORSTEEL'S CFR ROOF CURB

## CFR ROOF CURB FOR SSR ROOF

Norsteel's SSR™ Standing Seam Roof system has earned the reputation as one of the finest roof systems available today. When penetrations are necessary, the material used must be equal in quality and performance to the roof system. That is why the Norsteel SSR Roof CFR Curb System becomes an extremely critical component of the total roof package.

Specifically designed and manufactured to conform to Norsteel's SSR roof, this curb design features concealed fasteners, one piece construction and ease of installation.


Designed by people experienced in the erection of Norsteel's SSR roof, this roof curb has been proven by thousands of installed units.

CFR Roof Curbs are constructed of zinc coated aluminum with mitered corners and seams joined by continuous weathertight and airtight welds. Gauge is determined by the specific engineering requirement of individual units. The single piece curb unit utilizes pre-punched fastener holes for ease of installation. The curb flange is turned in on three sides, allowing for the unique feature of concealed fasteners. Inside the unit, the finished surface of the rigid insulation provides a clean, light-reflecting surface.

Standard features include minimum height of 8", rigid insulation, prefabricated sub-framing and a built-in diverter. The cricket is factory formed to assure maximum performance. Custom sizes and heights are available. Each unit comes complete with installation accessories consisting of fasteners, mastic, caulking, hard rubber plugs and installation manual.


Optional features include burglar bars, skylights, vents and roof hatches, plus cross supports for duct drops.

**NOTE: ALL PANELS FORMED FROM LIGHT GAUGE METAL MAY EXHIBIT WAVINESS, ALSO KNOWN AS "OIL CANNING," COMMONLY OCCURRING IN, BUT NOT RESTRICTED TO, FLAT PORTIONS OF A PANEL. THIS INHERENT CHARACTERISTIC IS NOT A DEFECT OF MATERIAL OR MANUFACTURING AND IS NOT CAUSE FOR REJECTION.**

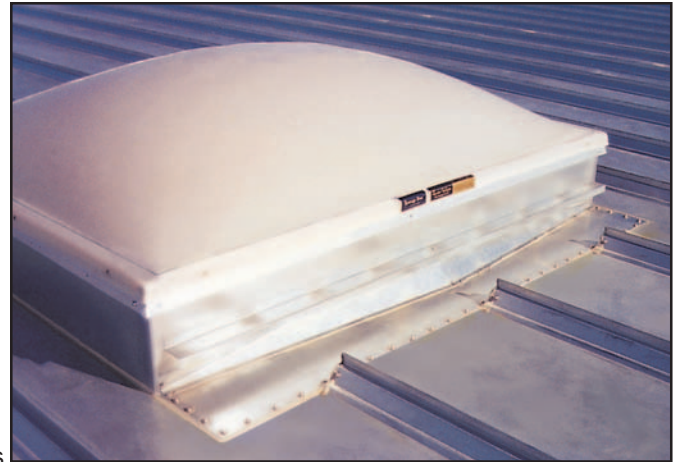

### FEATURES

- Specifically designed for Norsteel's SSR roof
- Excellent for retrofit and HVAC units
- Prefabricated sub-frame
- Complete installation kit includes mastic, caulking and fasteners
- One-piece construction
- Concealed fasteners



**NORSTEEL**  
BUILDINGS LIMITED

